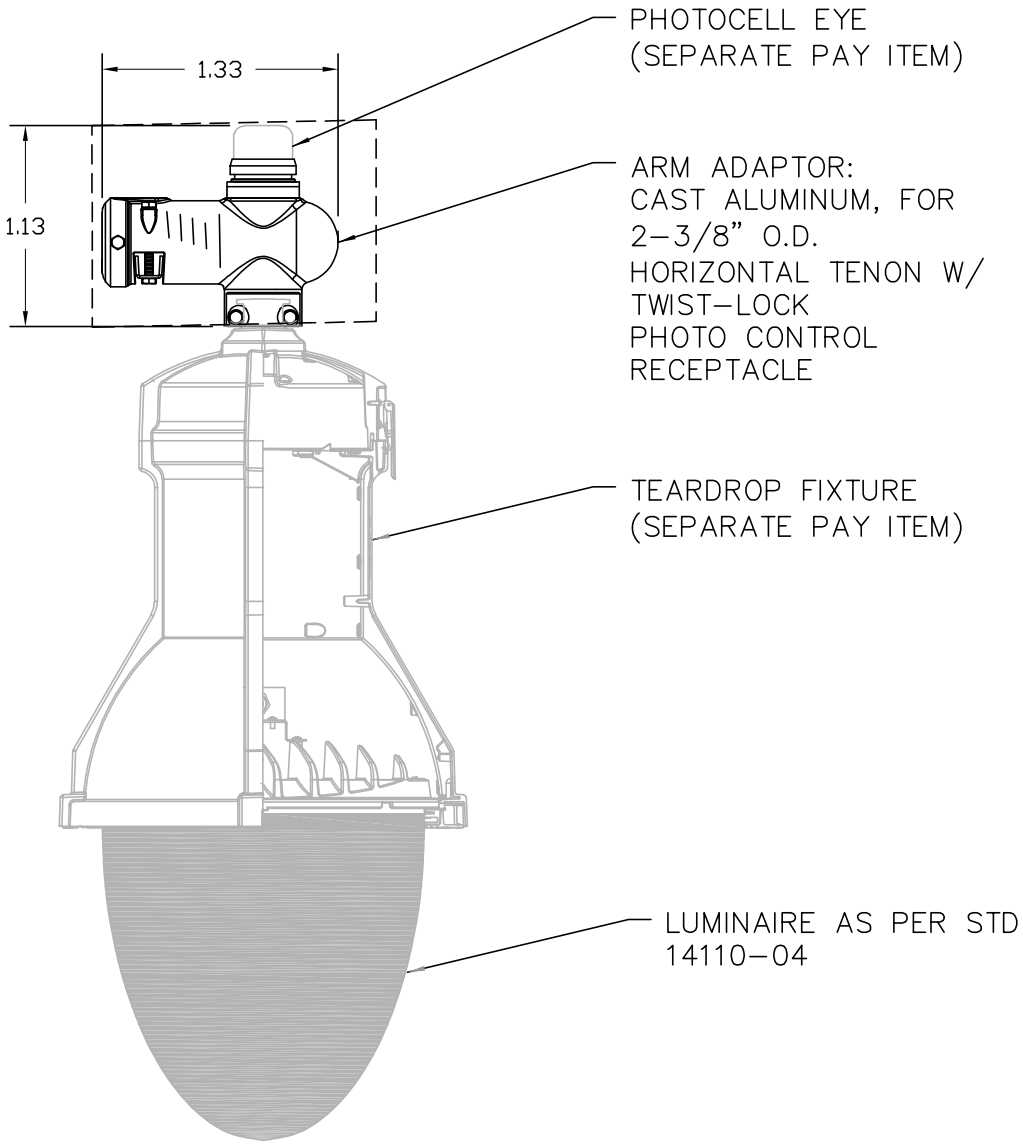

NOTES:

1. THE ADAPTER CAN ACCOMMODATE ARMS UP TO 2–3/8" OUTER DIAMETER.
2. THE CONTRACTOR SHALL INSPECT THE EDGE BETWEEN THE FIXTURE CLAMP AND THE CLAMP COLLAR FOR ANY POTENTIAL GAPS. THE CONTRACTOR SHALL SEAL GAPS USING A SUITABLE OUTDOOR (WEATHERPROOF) WATERPROOFING SEALANT.

ARM ADAPTOR FOR TEARDROP

REVISION & DATE

ARLINGTON
VIRGINIA

ARLINGTON COUNTY, VIRGINIA
DEPARTMENT OF ENVIRONMENTAL SERVICES

DRAWING NO.
14090-04